
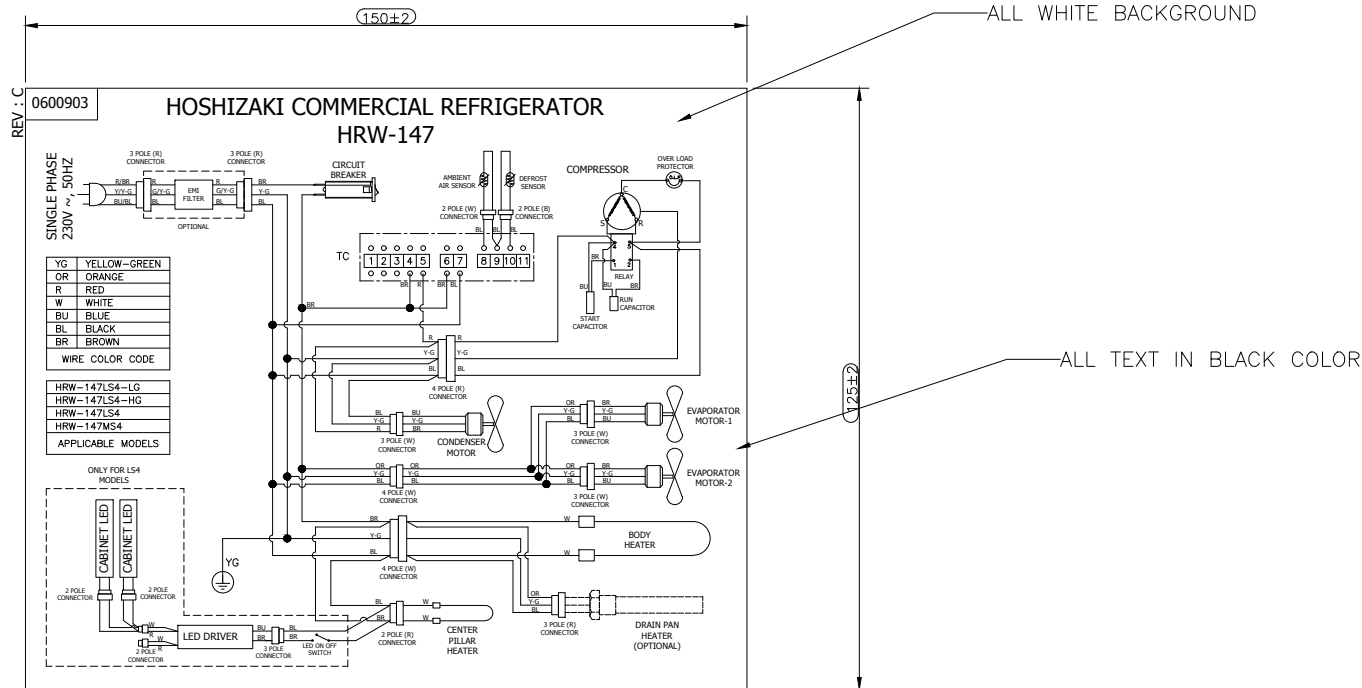



CHANGE NOTE						
REVISION	SHEET NO	ZONE	DETAILS	ECN	DATE	DRAWN
B	-	-	HRW-147-HG MODEL ADDED AND DRAWING CORRECTED	-	05.06.17	TANZIL
C	-	-	DRAWING FORMAT UPDATED & ADDED MODEL TABLE WITH NEW MODEL HRW-147LS4-LG	-	05.04.19	SACHIN



NOTE:--:

- 1) GLUE POSITION IS AT REAR SIDE OF STICKER.
- 2) EASY TO REMOVE RELEASE FILM.
- 3) RELEASE FILM THICKNESS IS 0.13 TO 0.15 mm.
- 4) CUTTING SHOULD BE FREE FROM BURRS AT EDGES.
- 5) PRINTING SHOULD BE SHARP & FREE FROM COLOR MIXING.
- 6) PRINTING INK SHOULD BE U.V. STABILIZED.
- 7) STICKER SHOULD WITH STAND A TEMPERATURE RANGE BETWEEN -40° TO 120°C.
- 8) FREE FROM PIN HOLES AND SCRATCHES.
- 9) WHILE INSPECTION STICKER SHOULD BE CHECKED BY RUBBING THE MARKING AND BY HAND FOR 15 SECONDS WITH A PIECE OF CLOTH SOAKED WITH WATER, AGAIN FOR 15 SECONDS WITH PIECE OF CLOTH SOAKED WITH PETROLEUM SPRIT.
- 10) STICKER SIZE WILL REMAIN SAME, TEXTURE/GRAPHIC WILL VARY WITH MODEL.
- 11) GRAPHICS AS PER ART WORK PROVIDED.
- 12) KEEP MAX. 5mm BLANK FROM OUTSIDE BORDER.

MATERIAL	POLYSTER OPEQUE	UNSPECIFIED TOLERANCES					SCALE: NTS  ALL DIMENSIONS ARE IN MM	TITLE RATED WIRING DIAGRAM		DWG. NO: 0600903	REVISION C				
THICKNESS	0.1±0.03MM	DIM	<30	30-100 0	100-500 00	>500			SAP CODE 1601842						
		TOL	±2	±3	+8/-5	+10/-5									
SIZE	-	UNSPECIFIED TOL. ON ANGLE ARE ±0.5°					DRAWN BY PRATAP	MODEL HRW-147							
COLOR	-	1 "O" DIMENSIONS ARE IMPORTANT. 2 REFERENCE DIMENSIONS ARE MARKED WITH " () " 3 PART SHOULD BE FREE FROM SHARP EDGES & BURRS					CHECKED BY -	RELEASE DATE 02.02.17	SHEET 1 OF 1						
NET WEIGHT	-														
GROSS WEIGHT	-														
DESIGN SCRAP	-	REFERENCE STANDARD -					APPROVED BY PARESH	RELEASE STAGE: RELEASED							