


NOTE: COMPONENT AND ASSEMBLY MUST BE COMPLIANT TO APPLICABLE RECENT ROHS DIRECTIVES.

ARABIC VERSION

CHANGE NOTE

REVISION	SHEET NO	ZONE	DETAILS	ECN	DATE	DRAWN
B	1	D1	LED DISTRIBUTION TABLE ADDED.		01.06.18	SACHIN

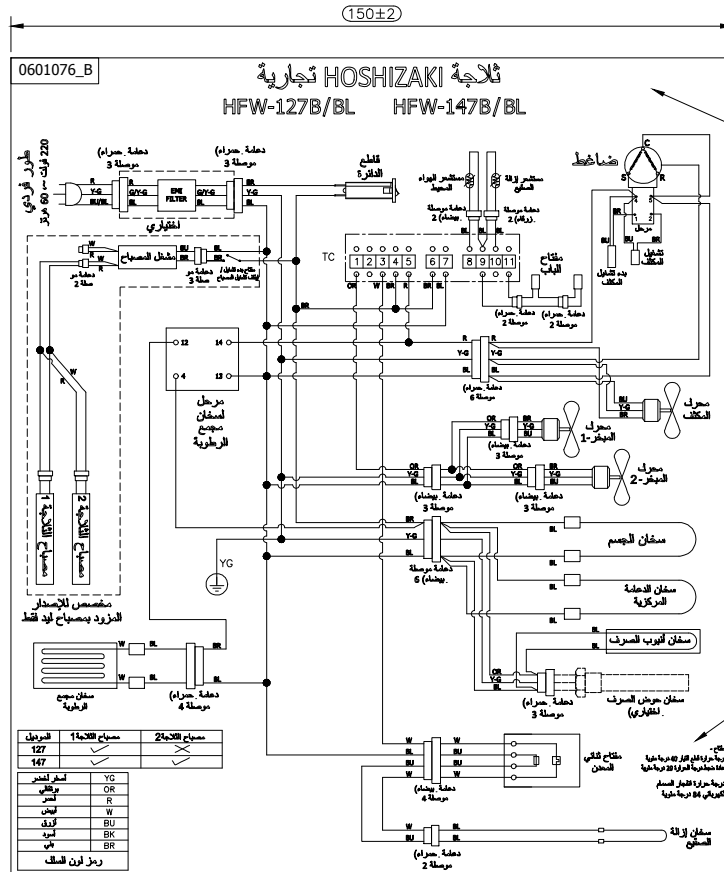

NOTE:-:

- 1) GLUE POSITION IS AT REAR SIDE OF STICKER.
- 2) EASY TO REMOVE RELEASE FILM.
- 3) RELEASE FILM THICKNESS IS 0.13 TO 0.15 mm.
- 4) CUTTING SHOULD BE FREE FROM BURRS AT EDGES.
- 5) PRINTING SHOULD BE SHARP & FREE FROM COLOR MIXING.
- 6) PRINTING INK SHOULD BE U.V. STABILIZED.
- 7) STICKER SHOULD WITH STAND A TEMPERATURE RANGE BETWEEN - 40°C TO 120°C.
- 8) FREE FROM PIN HOLES AND SCRATCHES.
- 9) WHILE INSPECTION STICKER SHOULD BE CHECKED BY RUBBING THE MARKING AND BY HAND FOR 15 SECONDS WITH A PIECE OF CLOTH SOAKED WITH WATER, AGAIN FOR 15 SECONDS WITH PIECE OF CLOTH SOAKED WITH PETROLEUM SPRIT.
- 10) STICKER SIZE WILL REMAIN SAME, TEXTURE/GRAPHIC WILL VARY WITH MODEL.
- 11) GRAPHICS AS PER ART WORK PROVIDED.
- 12) KEEP MAX. 5mm BLANK FROM OUTSIDE BORDER.
- 13) DRAWING IS FOR SIZE REFERENCE ONLY.

MATERIAL	POLYSTER OPEQUE	UNSPECIFIED TOLERANCES				SCALE: NTS  ALL DIMENSIONS ARE IN MM	TITLE RATED WIRING DIAGRAM ARABIC LANGUAGE		DWG. NO: 0601076	REVISION B	
THICKNESS	0.1±0.03MM	DIM	<30	30-100	100-500	>500	DRAWN BY SACHIN	MODEL HFW-127-B/ICB, 147-B/ICB	SAP CODE 1602672		
SIZE	-	TOL	±2	±3	+8/-5	+10/-5			CHECKED BY PRATAP	RELEASE DATE 30.03.18	SHEET 1 OF 1
COLOR	-	UNSPECIFIED TOL. ON ANGLE ARE ±0.5°				REFERENCE STANDARD -	APPROVED BY PARESH	RELEASE STAGE: RELEASED			
NET WEIGHT	-	1 "O" * DIMENSIONS ARE IMPORTANT. 2 REFERENCE DIMENSIONS ARE MARKED WITH " (")" * 3 PART SHOULD BE FREE FROM SHARP EDGES & BURRS									
GROSS WEIGHT	-										
DESIGN SCRAP	-									