

HOSHIZAKI EUROPE B.V  
Burgemeester Stramanweg 101 1101 AA Amsterdam, The Netherlands  
Tel: +31 20 691 8499  
e-mail: sales@hoshizaki.nl  
web: www.hoshizaki-europe.com



**Code:**


**COLD UNITS**

**Model:**

123141070

**ADVANCE F 140-3 FREEZER CABINET**

ADVANCE F 140-3



#### MAIN FEATURES

- \* GN 2/1 size freezer with double door
- \* 304 quality stainless steel
- \* Operating temperature -25 / -12 °C
- \* Clean free condenser
- \* Maximum internal capacity minimal temperature increase during defrost.
- \* Most efficient air distribution inside with a specially designed air channel.
- \* The inner liners and inner lower base which are moulded comply with the highest hygiene standards with rounded corners and are made of stainless steel.
- \* Monoblock design
- \* Automatic fan cutout switch and internal led light
- \* Wide magnetic removable gasket with triple indulation area provides an effective seal which reduces heat lost.
- \* 40-42 kg/m3 density environment friendly HFC-Free Polyurethane insulation for low energy consumption (60 mm)
- \* Protecting Class (IP2X)
- \* Ventilated cooling design
- \* Reversible door allows the appliances to be adapted to any individual installation site.

#### OPTIONS

- \* **Leg Option:** Leg/Castor
- \* **Shelf Option:** Nylon
- \* **Plug Option:** UK/EU

#### ACCESSORIES

- \* Master Key
- \* Set of Plastic Coated Shelf
- \* Double Door Cabinet Rails
- \* Set of Stainless Steel Leg
- \* Set of Ø100 Castor


#### STANDARDS

- \* EN 60335-1 European Standard relating to safety of household and similar electrical appliances
- \* EN 60335-2-89 European Standard relating to particular requirements for commercial refrigerating appliances with an incorporated or remote refrigerant unit or compressor
- \* ISO 22041:2019 Refrigerated storage cabinets and counters for professional use Performance and energy consumption





Code:	COLD UNITS	Model:
123141070	ADVANCE F 140-3 FREEZER CABINET	ADVANCE F 140-3

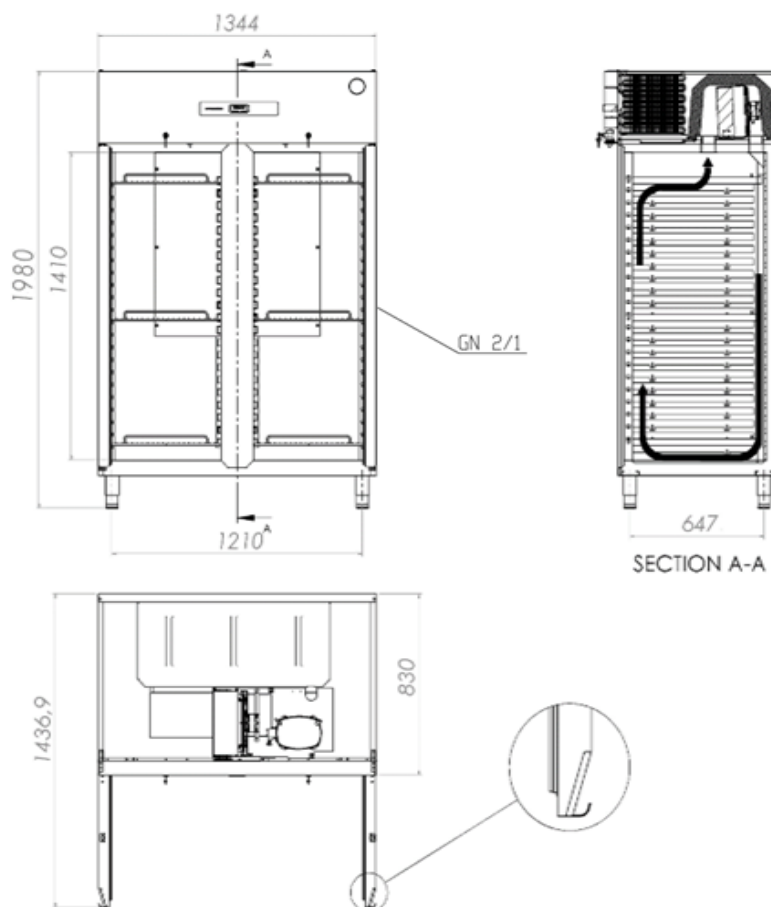

DIMENSIONS (Net)		DIMENSIONS (Shipping)	
* Width (mm) :	1344	* Width (mm):	1410
* Depth (mm) :	830	* Depth (mm):	860
* Height (mm) :	1980	* Height (mm):	2050
* Weight (kg) :	178	* Weight (kg):	198
		* Volume (m³):	2,48

#### TECHNICAL SPECIFICATIONS

* Gross Volume:	1200 L	* Cooling Temperature:	-25 / -12 °C
* Net Volume:	797 L	* Cooling Capacity:	R290
* Climate Class:	CC5 (+40 °C - %40 Rh)	* Cooling Capacity:	674 W (-30° / +45°)
* Energy Efficiency Class:	D	* Supply Voltage:	230V / NPE 50 Hz
* Energy Efficiency Index:	67,44	* Protection Class:	IP 2X
* Energy Consumption:	9,977 kW/24h	* Cooling System Design:	Ventilated
* Connection Load:	700 W	* Sound Level:	56 dB

