



HOSHIZAKI

FM-1200ALKE-CO2N-SB


**R744 Split Nugget ice machine
(w/out condensing unit).
Ice production up to 1060 kg/24h.**

MODELS AVAILABLE


- ☐ FM-600ALKE-CO2-SB ☐ FM-600ALKE-N-CO2-SB ☐ FM-1200ALKE-CO2-SB
☒ FM-1200ALKE-N-CO2-SB ☐ FM-1800ALKE-CO2-SB ☐ FM-1800ALKE-N-CO2-SB




ICE STORAGE CONFIGURATIONS (sold separately)



SG-500



ITS-100



B-340 SA (+TK18D Top Kit)



Residual water approx 10%

Nugget ice is:

A dryer form of our versatile flake ice form, suitable for all applications where slow-melting granular ice is desired, typically large display surfaces. Nugget ice is extruded through smaller diameter holes, hence it retains a lower percentage of residual water (approx. 90% frozen vs. 10% unfrozen water). It will keep free-flowing for longer periods. It is perfect to maintain fresh products at the correct storage temperature & moisture levels, preserving their texture, appearance and commercial value across store opening hours.

MODEL	Cooling	Max. production in 24h Air 10°C Water 10°C (kg)	Max. production in 24h Air 21°C Water 15°C (kg)	Max. production in 24h Air 32°C Water 21°C (kg)	Electric Connection	Electrical circuit breaker protection	Electrical consumption 24h power factor 88%	Water consumption liters m³/24h @10°C/10°C (ice production)
FM-1200ALKE-N-CO2-SB	Air	1060	1000	920	1/220-240V/50Hz	CIRCUIT BREAKER, EARTH WIRE	515W	1.07

Powered by R744 Natural Refrigerant,
energy efficient and sustainable, with a GWP = 1.
Energy savings may vary depending on electrical
specs when compared to HFC equivalent model.



SERIES: MODULAR ICE MAKER

ITEM: F140-C106

Modular nugget ice machine for connection with R744 central cooling system.

Configuration includes:

- Evaporator only (without compressor and condenser)
- Superheat expansion valve controller
- Evaporation pressure regulator settings: suction pressure 15 bar, evaporation temperature -25°C
- High pressure safety valve. Operates above 4.7MPa (47 bar)

NB: Pressure transmitter not included

Key features:

- Sustainable flake ice production: minimal ecological impact resulting from the use of natural refrigerant R744 / CO2 (carbon dioxide, carbon and oxygen), GWP = 1, ODP = 0
- Optimized energy efficiency: carbon dioxide natural refrigerant allows for increased efficiency and ice output vs. chemical refrigerants.
- Easy machine operation and self-diagnose by front panel positioned control touch-pad and LED screen, with cover.
- Augers is made of double hardened stainless steel.
- Carbon bearings avoid tedious seizures, assuring longer product life expectancy and reduced maintenance costs.
- Hoshizaki's patented, fully automated, self-flushing system for the entire hydraulic components, keeps machine free from mineral deposits for longer intervals.
- Electronic expansion valve for optimum evaporation efficiency
- Stainless steel frame base, front and side panels.
- Inside augers shafts water trays; re-start delay timer protection against freeze-ups; voltage surge protection; water level monitoring, gear motor thermal protection, motor rotation protection, storage bin ice-level regulating switch.
- Water supply: inlet 3/4" external thread (rear).
- Water drain: outlet 3/4" external thread (rear).

Ice storage bins in various sizes and designs, sold separately
Water softening is recommended for very hard water and large flow rates. Reverse Osmosis not to be used, as de-mineralized water may damage the freezing cylinder-auger-gear motor assembly.



COMMERCIAL WARRANTY AGAINST MANUFACTURING DEFECTS

PARTS	2 YEARS	LABOUR	2 YEARS
-------	----------------	--------	----------------

EXTERIOR FINISH

Stainless Steel,
Galvanized Steel (Rear)

Refrigerant: R744

OPERATING CONDITIONS LIMITATIONS

- Ambient Temperature Range: 5°C / 40°C
- Water temperature Range: 5°C / 35°C
- Water Supply Pressure: 0.05 / 0.8 MPa (0.5 - 0.8 bar)
- Voltage Range: Rated voltage ±10%

TECHNICAL CERTIFICATIONS



For more information visit our website at
www.hoshizaki-europe.com
Hoshizaki Europe B.V. retains the right to change
products and their specifications without prior notice.

Hoshizaki Europe B.V.
Burgemeester Stramanweg 101,
1101 AA Amsterdam
The Netherlands

T: +31 (0)20 691 8499
F: +31 (0)20 691 8768
sales@hoshizaki.nl
www.hoshizaki-europe.com




HOSHIZAKI

LEADING NATURALLY

FM-1200ALKE-N-CO2-SB

R744 Split Nugget ice machine (w/ out condensing unit).

Ice production up to 1060 kg/24h.

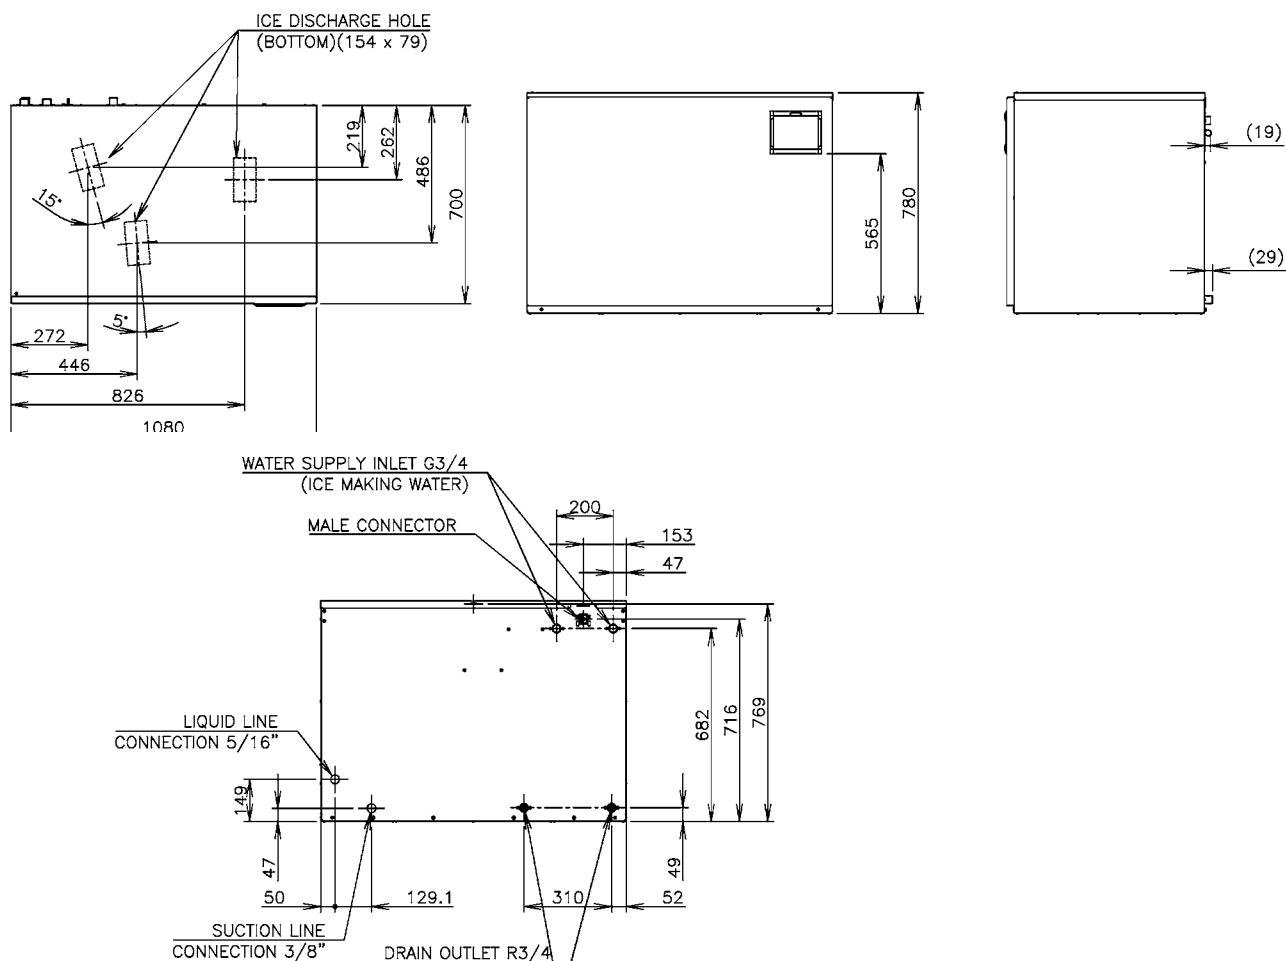

SHIPPING SPECIFICATIONS

MODEL	Net Equipment Dimensions		Crated dimensions		
	W x D x H (mm)	Net Weight (kg)	W x D x H (mm)	Gross Weight (kg)	Volume (m³)
FM-1200ALKE-N-CO2-SB	762 x 700 x 780	99	873 x 820 x 947	111	0.68

ACCESSORIES & CERTIFICATIONS

- Mounting bracket
- Installation Kit
- Water supply tube, Water drain tube
- Certification standard: EC (IEC) FCM, HACCP
- Safety: IEC Conform to the standard



Hoshizaki Belgium:
Hoshizaki Denmark:
Hoshizaki Deutschland:
Hoshizaki France:
Hoshizaki Iberia:
Hoshizaki Italia:

info@hoshizaki.be
info@hoshizaki.dk
info@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
info@hoshizaki.it

Hoshizaki Middle East:
Hoshizaki Netherlands:
Hoshizaki Norge:
Hoshizaki United Kingdom:
Hoshizaki Sverige:
Export Countries:

sales@hoshizaki.ae
info@hoshizaki.nl
info@hoshizaki.no
uksales@hoshizaki.co.uk
info@hoshizaki.se
sales@hoshizaki.nl

www.hoshizaki-europe.com