
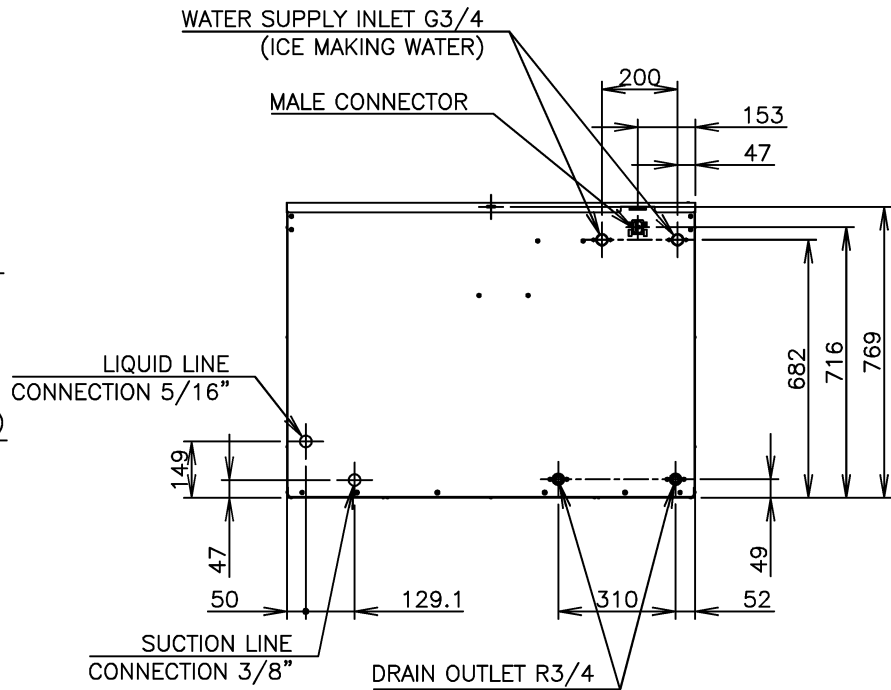
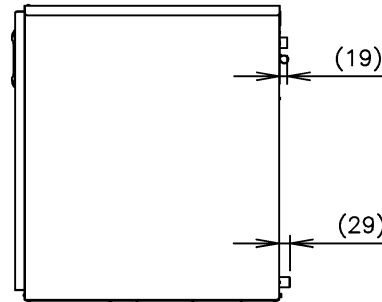
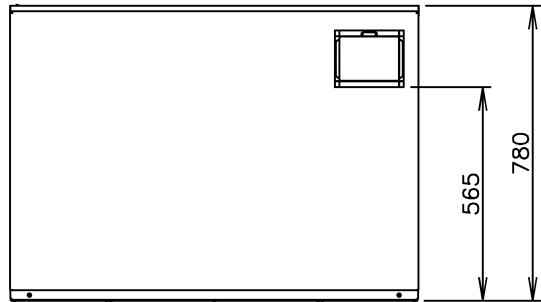


ITEM	HOSHIZAKI FLAKE ICE MAKER
MODEL	FM-1800ALKE-CO2-SB
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 1.08kVA (4.74A)
AMPERAGE	3.7A Starting: 16.5A
ELECTRIC CONSUMPTION	710W (Power Factor: 83%)
ICE PRODUCTION PER 24h	Suction Pressure 15 bar, Evaporator Temp -25°C Approx. 1800kg (Ambient Temp 10°C, Water Temp 10°C) Approx. 1680kg (Ambient Temp 21°C, Water Temp 15°C) Approx. 1530kg (Ambient Temp 32°C, Water Temp 21°C)
SHAPE OF ICE	Flake
MAX. STORAGE CAPACITY	Not Applicable
WATER CONSUMPTION PER 24h	Approx. 1.81m³ (Ambient Temp 10°C, Water Temp 10°C) Approx. 1.57m³ (Ambient Temp 21°C, Water Temp 15°C) Approx. 1.35m³ (Ambient Temp 32°C, Water Temp 21°C)
OUTSIDE DIMENSIONS	1080 (W) x 700 (D) x 780mm (H)
CABINET	Stainless Steel, Galvanized Steel (Rear)
ICE MAKING SYSTEM	Thin ice forming inside Cylinder (Flake Ice)
WATER SUPPLY SYSTEM	Direct Connection to Water Main, inlet: G3/4 x 2 (Rear)
DRAIN SYSTEM	Outlet: R3/4 x 2 (Rear)
EVAPORATOR	Tube coiled around Cylinder (Solder Plated)
REFRIGERANT	R744
BIN CONTROL	Actuator and Reed Switch (Time delay controlled)
ICE MAKING WATER CONTROL	Float Switch and Solenoid Valve
ELECTRIC CIRCUIT PROTECTION	Circuit Breaker, Earth Wire
HIGH PRESSURE SAFETY VALVE	47 bar
GEAR MOTOR PROTECTION	Thermal Protector (Auto-reset) Motor Rotation Protection, Current Protection (Manual-reset)
LOW WATER PROTECTION	Float Switch and Microprocessor
MECHANISM PROTECTION	Micro Switch (Manual-reset)
INTERLOCK	Shutdown by Microprocessor (Manual-reset)
WEIGHT	141kg (Gross 155kg)
PACKAGE	Carton 1191 (W) x 820 (D) x 947mm (H)
ACCESSORIES	Mounting Bracket, Installation Kit
OPERATING CONDITIONS	Ambient Temp: 5-40°C, Water Supply Temp: 5-35°C Water Supply Pressure: 0.05-0.8 MPa (0.5-8 bar) Voltage Range: Rated Voltage±10%

- *We reserve the right to make changes in specifications and design without prior notice.
1. Install the ice maker properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided.
 2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.
 3. Working Pressure: Max. 40 bar (liquid line)
 4. Product Code: F141

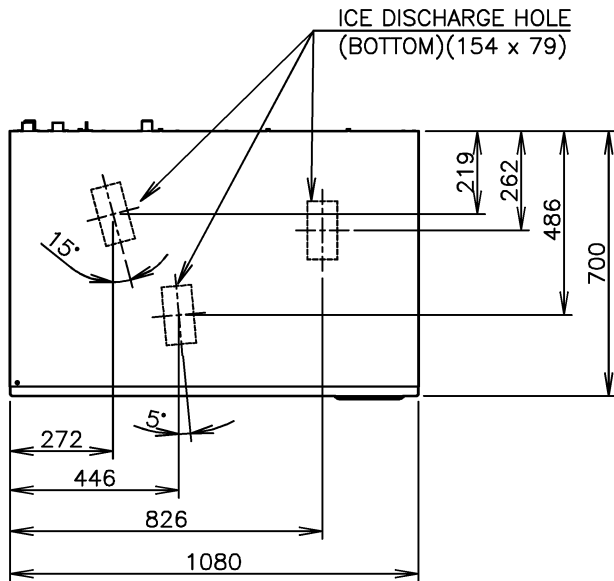

HOSHIZAKI FLAKE ICE MAKER FM-1800ALKE-CO2-SB

APPROVED NISHIO	CHECKED MIZUTANI	DESIGNED TASHIRO	DRAWN UEDA	SCALE 1/20	TRIGONOMETRY
NISHIO APPROVED	TASHIRO DESIGNED	2019.12.05 DATE	2019.11.20 DATE	D27639 DRAWING NO.	1 SYMBOL