

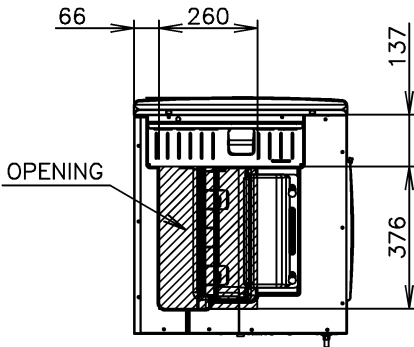
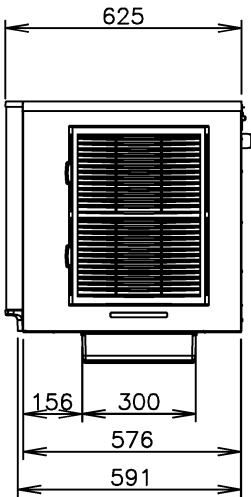
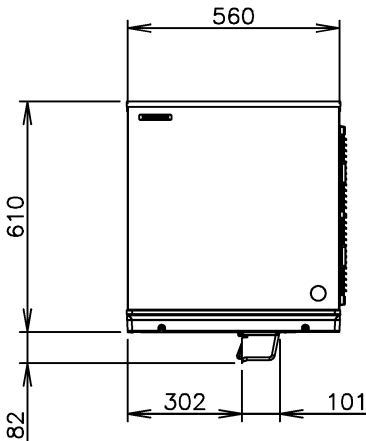


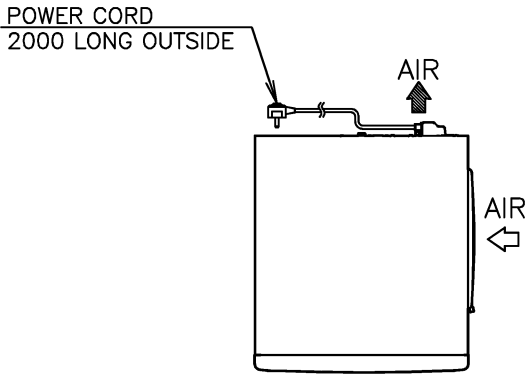

WEIGHT	57kg (Gross: 66kg)	ITEM	Hoshizaki Crescent Ice Maker
PACKAGE	Carton 710mm (W) x 659mm (D) x 796mm (H)	MODEL	KMD-270ABE-R452
ACCESSORIES	Instruction Manual, Universal Brace (2), Bolt (2) Check Valve (-C111), Nipple (-C111) Power Cord-SE type plug (-C141), BF type plug (-C121, 171) O type plug (-C101, 111)	AC SUPPLY VOLTAGE	1 Phase 220-240V 50Hz
		AMPERAGE	4.9A (AT. 32°C, WT. 21°C)
		STARTING AMPERAGE	24A
		ELECTRICAL CONSUMPTION	984W (AT. 32°C, WT. 21°C)
OPERATION CONDITION	Ambient Temp. : 7-40°C, Water Supply Temp. : 7-35°C Water Supply Pressure: 0.07-0.8MPa (0.7-8bar) Voltage Range: ±6%	POWER FACTOR	88%
		POWER SUPPLY CAPACITY	Min. 1.67kVA (7.3A)
*We reserve the right to make changes in specifications and design without prior notice. 1. Install the product properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided. 2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual. 3. Product Code: M098 		ICE PRODUCTION PER 24h	Approx. 275kg/d (AT. 10°C, WT. 10°C) Approx. 255kg/d (AT. 21°C, WT. 15°C) Approx. 221kg/d (AT. 32°C, WT. 21°C)
		WATER CONSUMPTION PER 24h	Approx. 0.98m³/d (AT. 10°C, WT. 10°C) Approx. 0.55m³/d (AT. 21°C, WT. 15°C) Approx. 0.33m³/d (AT. 32°C, WT. 21°C)
		SHAPE OF ICE	Crescent Cube
		FREEZE CYCLE TIME	Approx. 26.8Min (AT. 21°C, WT. 15°C)
		ICE PRODUCTION PER CYCLE	Approx. 5.3kg/572pcs (AT. 21°C, WT. 15°C)
		OUTSIDE DIMENSIONS	560mm (W) x 625mm (D) x 610mm (H) (not incl. Bin Sw)
		EXTERIOR	Stainless Steel, Plastic Frame (Front), Galvanized Steel (Rear)
		INSULATION	Polyurethane Foam
		INSULATION FOAM BLOWING AGENT	Cyclopentane
		CONNECTIONS-ELECTRIC	X-type Connection (With Plug)
		CONNECTIONS-WATER SUPPLY	Inlet Rc1/2 (connected at rear side)
		CONNECTIONS-DRAIN	Outlet Rc3/4 (connected at rear side)
		ICE MAKING SYSTEM	Vertical Evaporator with water flow on both sides
		HARVESTING SYSTEM	Water Supply Harvest Cycle and Hot Gas Defrost
		COMPRESSOR	Hermetic
		CONDENSER	Air-cooled, Fin and Tube type
		HEAT REJECTION	2435W (AT. 32°C, WT. 21°C)
		EVAPORATOR	Vertical type, Stainless Steel and Copper
		REFRIGERANT CONTROL	Thermostatic Expansion Valve
		REFRIGERANT	R452A/780g
ICE MAKING CONTROL SYSTEM	Float Switch		
HARVESTING CONTROL SYSTEM	Hot Gas and Water, Thermistor and Timer		
ICE MAKING WATER CONTROL SYSTEM	Timer Controlled, Overflow Pipe		
BIN CONTROL SYSTEM	Mechanical Bin Switch		
ELECTRICAL PROTECTION	Class I Appliance, 5A Fuse		
P.C. BOARD CIRCUIT PROTECTION	High Voltage Cut-out (Internal)		
COMPRESSOR PROTECTION	Auto-reset Overload Protector (Internal)		
REFRIGERANT CIRCUIT PROTECTION	Auto-reset High Pressure Control Switch		
LOW WATER PROTECTION	Float Switch		

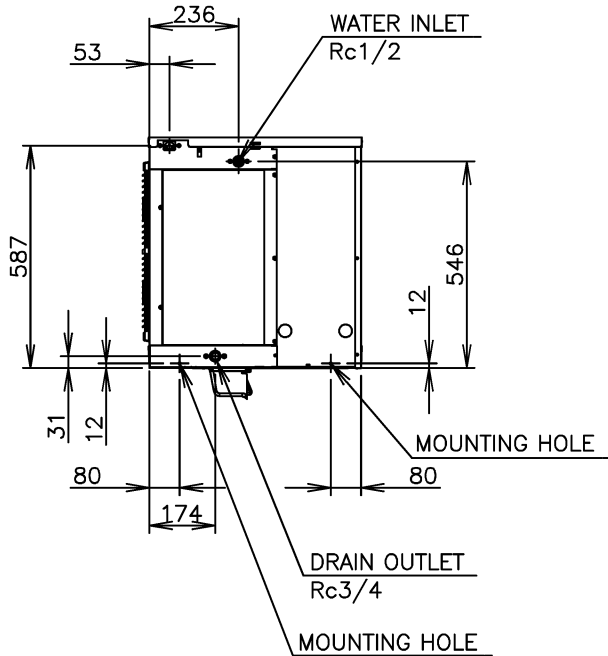