
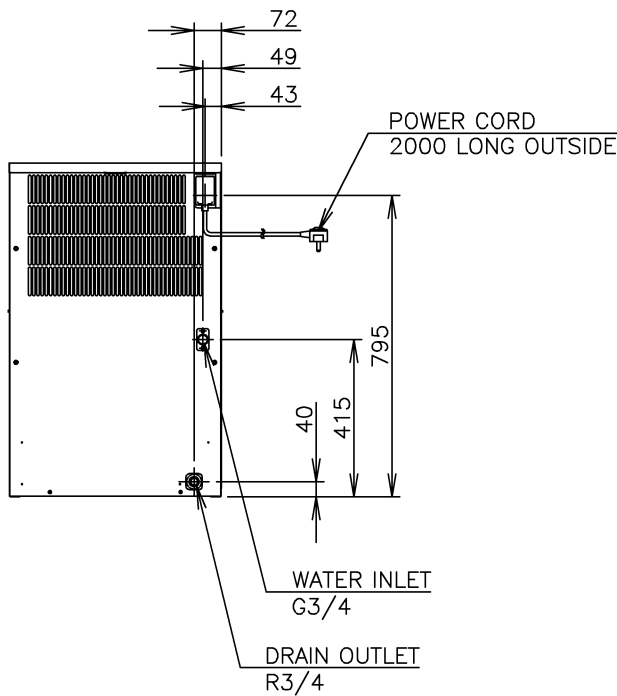
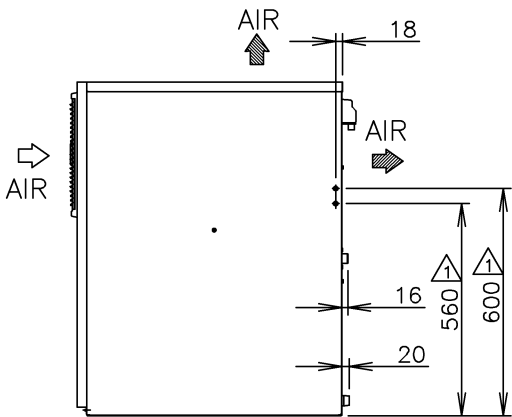



1. Install the ice maker properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.
3. Product code: E1CP-D002

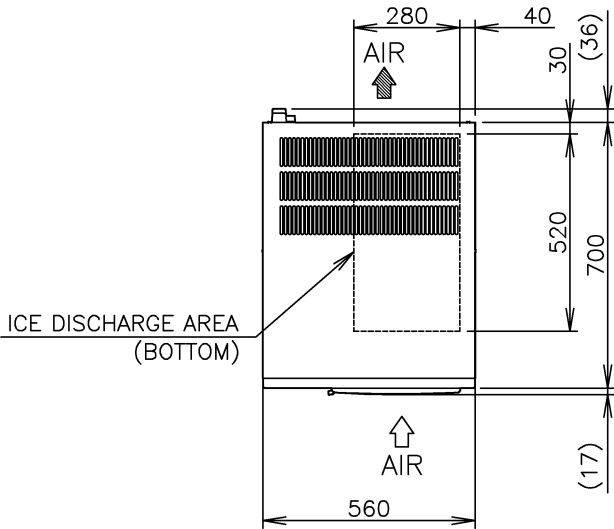

ITEM	Hoshizaki Cube Ice Maker	
MODEL	IM-240ANE-21	
POWER SUPPLY	1 PHASE 220-240V 50Hz Capacity: Min. 2.3kVA (9.6A)	
AMPERAGE	Running: 6.6A Rated Motor: 6.6A Starting: 35A	
ELECTRIC CONSUMPTION	Rated Motor: 1320W (Power factor: 83%)	
ICE PRODUCTION PER 24h	Approx. 190 (3mm) / 217 (7mm) kg (Ambient Temp.10° C, Water Temp.10° C) Approx. 180 (3mm) / 210 (7mm) kg (Ambient Temp.21° C, Water Temp.15° C) Approx. 165 (3mm) / 190 (7mm) kg (Ambient Temp.32° C, Water Temp.21° C)	
WATER CONSUMPTION PER 24h	Approx. 0.95m³ (Ambient Temp.10° C, Water Temp.10° C) Approx. 0.47m³ (Ambient Temp.21° C, Water Temp.15° C) Approx. 0.43m³ (Ambient Temp.32° C, Water Temp.21° C)	
SHAPE OF ICE	Cube Approx. 21 x 14 x 21mm	
FREEZE CYCLE TIME	Approx. 15min (3mm) (Ambient Temp.21° C, Water Temp.15° C)	
ICE PRODUCTION PER CYCLE	Approx. 2.1kg/360pcs. (3mm) (Ambient Temp.21° C, Water Temp.15° C)	
OUTSIDE DIMENSIONS	560mm(W) x 700mm(D) x 880mm(H)	
EXTERIOR	Stainless Steel	
△ INSULATION	Polyurethane Foam	
△ INSULATION FOAM BLOWING AGENT	Water Blown	
CONNECTIONS-ELECTRIC	X-Type Con. (with CONT. Plug)	
CONNECTIONS-WATER SUPPLY	Inlet G3/4 (connected at rear side)	
CONNECTIONS-DRAIN	Outlet R3/4 (connected at rear side)	
ICE MAKING SYSTEM	Cell type	
HARVESTING SYSTEM	Hot Gas Defrost	
COMPRESSOR	Hermetic	
CONDENSER	Fin and Tube type, Air-cooled	
HEAT REJECTION	2870W (2470kcal/h) (Ambient Temp.32° C, Water Temp.21° C)	
EVAPORATOR	Copper Tube on Sheet and Cells	
REFRIGERANT CONTROL	Thermostatic Expansion Valve	
REFRIGERANT CHARGE	R404A/480g	
△ ICE MAKING CONTROL	Thermistor, Timer	Controller Board
△ HARVESTING CONTROL	Thermistor	
△ BIN CONTROL	Microswitch (with Time Delay)	
△ ICE MAKING WATER CONTROL	Timer, Water Pan's Movement	
	ELECTRICAL PROTECTION	Class I Appliance, 5A Fuse
	COMPRESSOR PROTECTION	Auto-reset Overload Protector
	ICE MAKER PROTECTION	Interlock by Controller Board
△ WEIGHT	80kg (Gross 95kg)	
△ PACKAGE	Carton 665mm(W) x 820mm(D) x 1054mm(H)	
	ACCESSORIES	Scoop, Installation Kit, Ice Chute
	OPERATING CONDITIONS	Ambient Temp.: 1 - 40° C, Water Supply Temp.: 5-35° C Water Supply Pressure: 0.07-0.8MPa (0.7-8bar) Voltage Range: Rated Voltage±6%

\*We reserve the right to make changes in specifications and design without prior notice.